

SUBMITTAL DATA - OUTDOOR UNIT VFP192C432Y

VRF	HEAT I	PUMP
	208-23	0/3/60

Job Name:	Engineer:	
Location:	Architect:	
Schedule No.:	Date:	
System Designation:	For: Reference Approval Review Construction	

FEATURES

- Two-pipe heat pump
- Accelerated complete coil defrost
- ECM Motors
- Thermal and Current Protection
- · Access to electrical box for ease of maintenance
- Compressor mounted on vibration isolation pads
- Intelligent duty cicle operation
- Two stages oil separation

- Electronic Expansion Valves
- Brazed Connections
- Subcooling Control Technology
- · Automatic Oil Balance

PRODUCT WARRANTY

Compressor - Seven year limited warranty All other components - Five year limited warranty

CD		П	CATI	ONI	•
ЭĽ	ᆮᆫᅵ		CATI	ON:	•

PERFORMANC	E			
Cooling Capacity	y* (Btu/h)		184,000	
EER		Ducted	3.11	
	(W/W)	Non Ducted	3.31	
		Mixed	N/A	
		Ducted	10.60	
	(Btu/h)/W	Non Ducted	11.30	
		Mixed	N/A	
		Ducted	21.30	
IEER	(Btu/h)/W	Non Ducted	23.00	
		Mixed	N/A	
Cooling Power Input (W)		7,30	7,300 + 7,300	
Heating Capacity(47°F)* (Btu/h)		206,000		
COP (47°F)		Ducted	3.25	
	(W/W)	Non Ducted	3.40	
		Mixed	N/A	
Heating Capacity (17°F)* (Btu/h)		134,000		
COP (17°F)		Ducted	2.26	
	(W/W)	Non Ducted	2.10	
		Mixed	N/A	
Heating Power Input (W)		7,850 + 7,850		

ELECTRICAL DATA	
Power Supply (V/PH/Hz)	208-230/3/60
MOCP (A)	45 + 45
MCA (A)	37 + 37
Circuit Breaker Capacity (A)	45 + 45

GENERAL DATA	
Combination Ratio Indoor / Outdoor	50% to 135%
Max. # of Indoor Units	32
Sound Pressure Level (dBA)	64
Refrigerant Type	R410a
Factory Refrigerant Charge (oz)	398.7 + 398.7
Compressor Type/Qty	Inverter Scroll / 1 + 1
Fan Type/Qty	Axial / 2 + 2

DIMENSIONS		
Unit Dimensions (in)	Height	63 1/4 + 63 1/4
	Width	52 3/4 + 52 3/4
	Depth	30 1/8 + 30 1/8
Liquid Pipe Connection (in)		3/8 + 3/8
Gas Pipe Connection (in)		7/8 + 7/8
Oil Pipe Connection (in)		3/8 + 3/8
Shipping Weight (lb)		695 + 695
Net Weight (lb)		662 + 662



NOTES:

*Cooling and Heating Capacity data AHRI-1230-2010 conditions







NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency. ©2019 Lennox Industries Inc.





DIMENSIONAL DRAWINGS

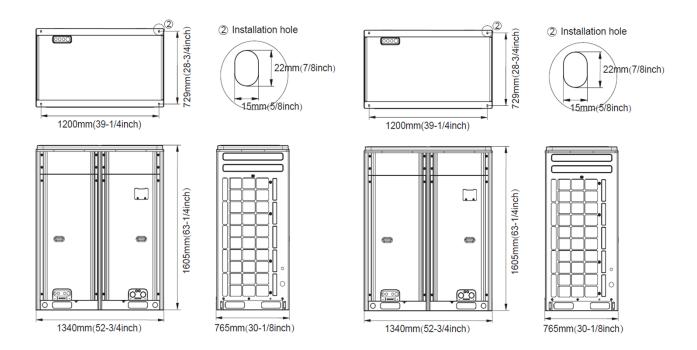

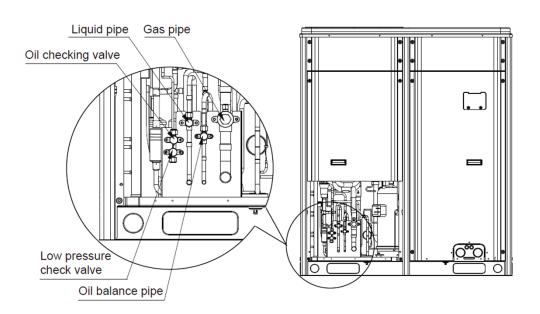

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency. ©2019 Lennox Industries Inc.