



**SUBMITTAL DATA - OUTDOOR UNIT**  
**VER120C432Y**  
**VRF HEAT RECOVERY**  
**208-230/3/60**

**Job Name:** \_\_\_\_\_  
**Location:** \_\_\_\_\_  
**Schedule No.:** \_\_\_\_\_  
**System Designation:** \_\_\_\_\_

**Engineer:** \_\_\_\_\_  
**Architect:** \_\_\_\_\_  
**Date:** \_\_\_\_\_  
**For:** \_\_\_ Reference \_\_\_ Approval \_\_\_ Review \_\_\_ Construction

**FEATURES**

- Three-pipe heat recovery
- Accelerated complete coil defrost
- Hermetically sealed compressor with crankcase heater
- Thermal and Current protection in Compressor
- Steel casing with baked enameled finish Compressor
- Access to electrical box for ease of maintenance
- High efficiency DC Inverter Scroll compressor
- Compressor mounted on vibration isolation pads
- Plastic Fan Blade
- Intelligent duty cycle operation
- Hydrophilic Aluminum Gold Fin
- Subcooling Control Technology

**PRODUCT WARRANTY**

Compressor - Seven year limited warranty  
 All other components - Five year limited warranty

**SPECIFICATIONS**

**PERFORMANCE**

Cooling Capacity (95°F)* (Btu/h)		111,000	
EER	(W/W)	Ducted	3.22
		Non Ducted	3.37
		Mixed	3.29
	(Btu/h)/W	Ducted	11.00
		Non Ducted	11.50
		Mixed	11.25
IEER	(Btu/h)/W	Ducted	22.80
		Non Ducted	24.00
		Mixed	23.40
Cooling Power Input (W)		9,580	
Heating Capacity (47°F)* (Btu/h)		126,000	
COP (47°F)	(W/W)	Ducted	3.30
		Non Ducted	3.50
		Mixed	3.40
Heating Capacity (17°F)* (Btu/h)		83,000	
COP (17°F)	(W/W)	Ducted	2.25
		Non Ducted	2.25
		Mixed	2.25
Heating Power Input (W)		10,420	

**ELECTRICAL DATA**

Power Supply	208-230/3/60
MOCP (A)	60
MCA (A)	50
No. of Compressors	2
No. of Fans	2

**GENERAL DATA**

Combination Ratio Indoor / Outdoor	50% to 135%
Max. # of Indoor Units	19
Sound Pressure Level (dBA)/Sound Power Level	63/73
Refrigerant Type	R410a
Factory Refrigerant Charge (oz)	412.7

**DIMENSIONS**

Unit Dimensions (in)	Height	63 1/4
	Width	52 3/4
	Depth	30 1/8
Liquid Pipe Connection (in)	1/2	
Low Pressure Gas Pipe Connection (in)	1-1/8	
High Pressure Gas Pipe Connection (in)	7/8	
Shipping Weight (lb)	827	
Net Weight (lb)	794	



NOTES:  
 \*Cooling and Heating Capacity data AHRI-1230-2010 conditions




NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency. ©2019 Lennox Industries Inc.








**SUBMITTAL DATA - OUTDOOR UNIT**  
**VER120C432Y**  
**VRF HEAT RECOVERY**  
208-230/3/60

**DIMENSIONAL DRAWINGS**

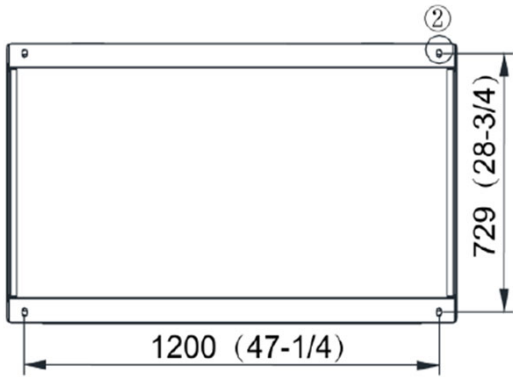

② Installation hole

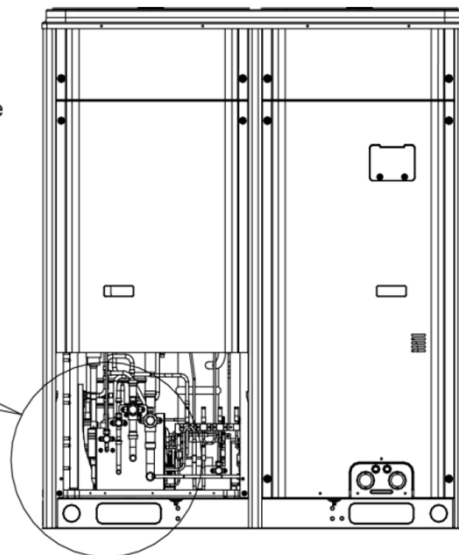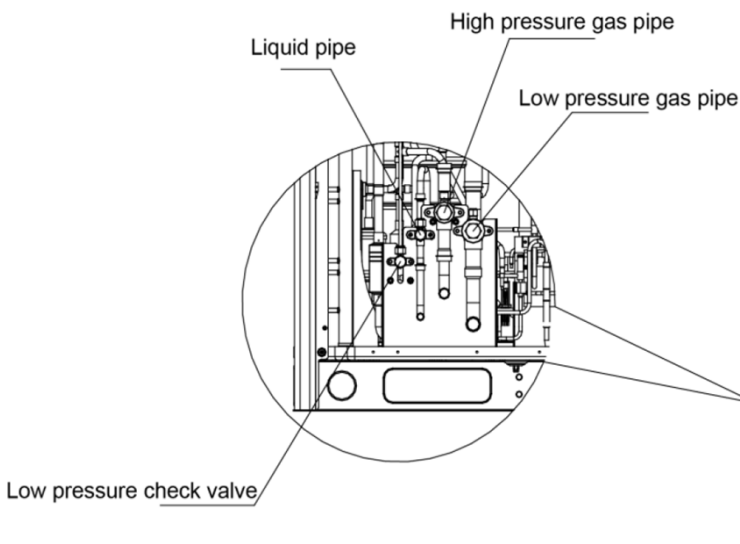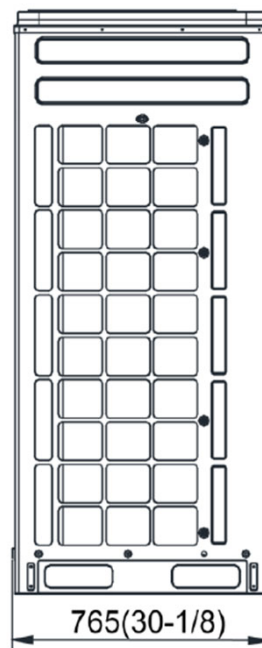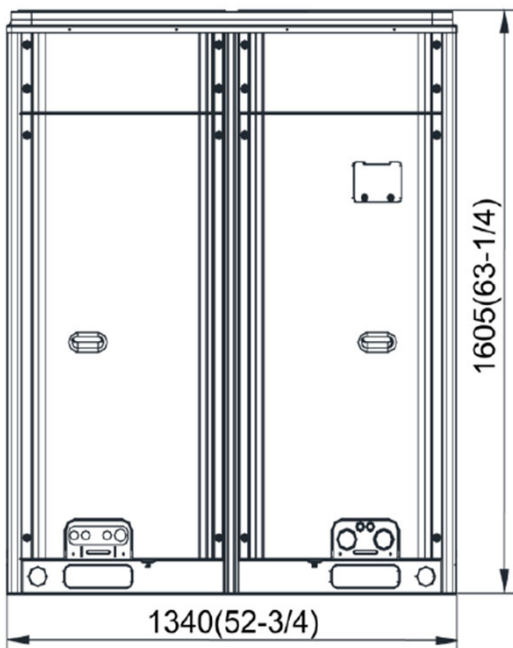

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency. ©2019 Lennox Industries Inc.