

SUBMITTAL DATA - INDOOR UNIT VEUM030C432P

	VEUM030C432P
VRF UNIVERSAL MOUNTED	TYPE EVAPORATOR
	208-230/60/1

Job Name:	Engineer:		
Location:	Architect:		
Schedule No.:	Date:		
System Designation:	For: Reference Approval Review Construction		

FEATURES

- · Auto Addressing installation
- Aut Destert
- Auto Restart
- · Auto Swing Louvers
- Built-in Electronic Expansion Valve
- LED Display

- Washable Filter
- Anti-Freezing Protection
- Enameled finish

PRODUCT WARRANTY


All covered components - one year limited warranty

SPECIFICATIONS		
PERFORMANCE		
Cooling Capacity* (Btu/h)		30,000
Heating Capacity* (Btu/h)		33,000
Airflow (CFM)	High	940
	Medium	850
	Low	685

Sound Pressure Level (dBA) H / M / L 50/46/43

ELECTRICAL DATA		
Power Supply (V / Ph / Hz)	208-2	230/60/1
MOCP (A)		15
Circuit Breaker (A)		15
MCA (A)		1
Rated Current (A)	Cooling	0.6
	Heating	0.6

DIMENSIONS		
Unit Dimensions (in)	Height	27 1/2
	Width	56
	Depth	9 1/2
Liquid Pipe Connection (in)		3/8
Gas Pipe Connection (in)		5/8
Drain Pipe Connection (in)		5/8
Shipping Weight (lb)		127.6
Net Weight (lb)		110

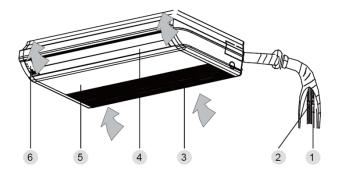

- 1. Drain Hose
- 2. Pipe Connection
- 3. Air Inlet Grill (Air Filter inside)
- 4. Swing Louvers
- 5. Front Panel
- 6. Display LED





NOTES:

*Cooling and Heating Capacity data is rated at the following conditions:


Cooling: 80 °F DB / 67 °F WB Indoor, 95 °F DB Outdoor

Heating: 70 °F DB Indoor, 47 °F DB



SUBMITTAL DATA - INDOOR UNIT VEUM030C432P VRF UNIVERSAL MOUNTED TYPE EVAPORATOR 208-230/60/1

DIMENSIONAL DRAWINGS

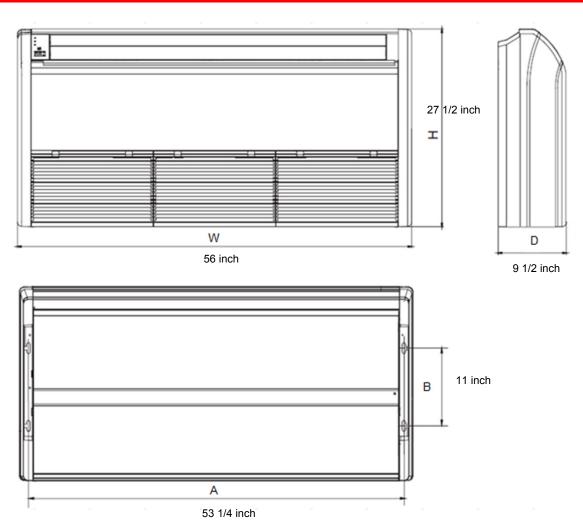

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency. ©2019 Lennox Industries Inc.