

## SUBMITTAL DATA - INDOOR UNIT VEHW007N432T VRF WALL MOUNTED TYPE EVAPORATOR

Job Name:	Engineer:
Location:	Architect:
Schedule No.:	Date:
System Designation:	For: Reference Approval Review Construction

#### **FEATURES**

- · Auto Addressing installation
- Auto Restart
- Auto Swing Louvers
- Built-in Electronic Expansion Valve
- LED Display
- Washable Filter

- Mildew-proof Filter
- Anti-Freezing Protection
- · Enameled finish

#### PRODUCT WARRANTY

All covered components - one year limited warranty

	ICAT	

# PERFORMANCE

 Cooling Capacity\* (Btu/h)
 7,506

 Heating Capacity\* (Btu/h)
 8,530

 Airflow (CFM)
 High Medium 294

 Low 206
 Low 206

Sound Pressure Level (dBA) H / M / L 38/34/30

#### **ELECTRICAL DATA**


Power Supply (V / Hz / Ph)	220-240	0/50/1
MOP (A)		6
Rated Current (A)	Cooling	0.2
	Heating	0.2

#### **DIMENSIONS**

Unit Dimensions (in) Height 10 3/4
Width 33 1/8
Depth 7

Liquid Pipe Connection (in) 1/4
Gas Pipe Connection (in) 3/8
Shipping Weight (lb) 27.5
Net Weight (lb) 22



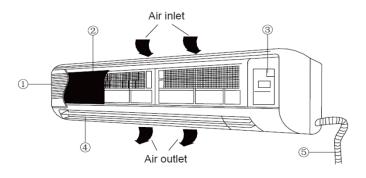

- 1. Surface Panel
- 2. Air Filters
- 3. Electronic Box Cover
- 4. Swing Louvers
- 5. Drain Hose

## NOTES:

\*Cooling and Heating Capacity data is rated at the following conditions:


Cooling: 80 °F DB / 67 °F WB Indoor, 95 °F DB Outdoor


Heating: 70 °F DB Indoor, 47 °F DB



# SUBMITTAL DATA - INDOOR UNIT VEHW007N432T VRF WALL MOUNTED TYPE EVAPORATOR

## **DIMENSIONAL DRAWINGS**

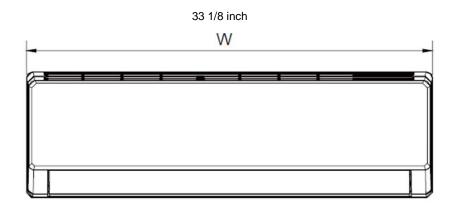







# SUBMITTAL DATA - INDOOR UNIT VEHW009N432T VRF WALL MOUNTED TYPE EVAPORATOR

Job Name:	Engineer:
Location:	Architect:
Schedule No.:	Date:
System Designation:	For: Reference Approval Review Construction

#### **FEATURES**

- · Auto Addressing installation
- Auto Restart
- Auto Swing Louvers
- Built-in Electronic Expansion Valve
- LED Display
- Washable Filter

- Mildew-proof Filter
- Anti-Freezing Protection
- · Enameled finish

#### **PRODUCT WARRANTY**

All covered components - one year limited warranty

#### **SPECIFICATIONS**

#### **PERFORMANCE**

Cooling Capacity* (Btu/h)		9,554
Heating Capacity* (Btu/h)		10,918
Airflow (CFM)	High	294
	Medium	247
	Low	206

Sound Pressure Level (dBA) H / M / L 38/34/30

#### **ELECTRICAL DATA**


Power Supply (V / Hz / Ph)	220-240	0/50/1
MOP (A)		6
Rated Current (A)	Cooling	0.2
	Heating	0.2

#### **DIMENSIONS**

Unit Dimensions (in)	Height	10 3/4
	Width	33 1/8
	Depth	7

Liquid Pipe Connection (in)	1/4
Gas Pipe Connection (in)	3/8
Shipping Weight (lb)	27.5
Net Weight (lb)	22



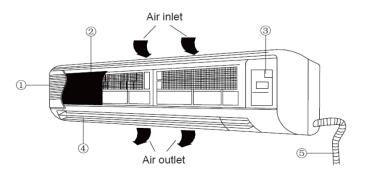

- 1. Surface Panel
- 2. Air Filters
- 3. Electronic Box Cover
- 4. Swing Louvers
- 5. Drain Hose

#### NOTES:

\*Cooling and Heating Capacity data is rated at the following conditions:


Cooling: 80 °F DB / 67 °F WB Indoor, 95 °F DB Outdoor


Heating: 70 °F DB Indoor, 47 °F DB



# SUBMITTAL DATA - INDOOR UNIT VEHW009N432T VRF WALL MOUNTED TYPE EVAPORATOR

## **DIMENSIONAL DRAWINGS**

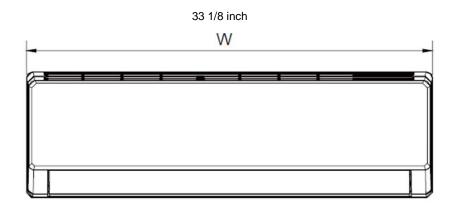







## SUBMITTAL DATA - INDOOR UNIT VEHW012N432T VRF WALL MOUNTED TYPE EVAPORATOR

Job Name:	Engineer:
Location:	Architect:
Schedule No.:	Date:
System Designation:	For: Reference Approval Review Construction

#### **FEATURES**

- · Auto Addressing installation
- Auto Restart
- Auto Swing Louvers
- Built-in Electronic Expansion Valve
- LED Display
- Washable Filter

- Mildew-proof Filter
- Anti-Freezing Protection
- · Enameled finish

#### **PRODUCT WARRANTY**

All covered components - one year limited warranty

SPECIFICATIONS
----------------

#### **PERFORMANCE**

 Cooling Capacity\* (Btu/h)
 12,283

 Heating Capacity\* (Btu/h)
 13,648

 Airflow (CFM)
 High Medium 371

 Medium Low 282

Sound Pressure Level (dBA) H / M / L 44/41/38

#### **ELECTRICAL DATA**


Power Supply (V / Hz / Ph)	220-24	0/50/1
MOP (A)		6
Rated Current (A)	Cooling	0.21
	Heating	0.21

#### **DIMENSIONS**

Unit Dimensions (in)	Height	11 3/4
	Width	37
	Depth	7 3/4
Liquid Pipe Connection (in)		1/4

Liquid Pipe Connection (in)1/4Gas Pipe Connection (in)1/2Shipping Weight (lb)33Net Weight (lb)27.5



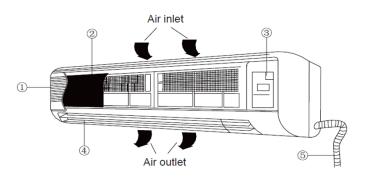

- 1. Surface Panel
- 2. Air Filters
- 3. Electronic Box Cover
- 4. Swing Louvers
- 5. Drain Hose

## NOTES:

\*Cooling and Heating Capacity data is rated at the following conditions:


Cooling: 80 °F DB / 67 °F WB Indoor, 95 °F DB Outdoor


Heating: 70 °F DB Indoor, 47 °F DB




# SUBMITTAL DATA - INDOOR UNIT VEHW012N432T VRF WALL MOUNTED TYPE EVAPORATOR

## **DIMENSIONAL DRAWINGS**

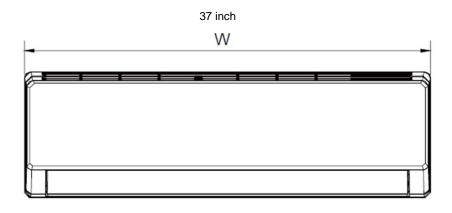







## SUBMITTAL DATA - INDOOR UNIT VEHW015N432T VRF WALL MOUNTED TYPE EVAPORATOR

Job Name:	Engineer:
Location:	Architect:
Schedule No.:	Date:
System Designation:	For: Reference Approval Review Construction

#### **FEATURES**

- · Auto Addressing installation
- Auto Restart
- Auto Swing Louvers
- Built-in Electronic Expansion Valve
- LED Display
- Washable Filter

- Mildew-proof Filter
- Anti-Freezing Protection
- · Enameled finish

#### **PRODUCT WARRANTY**

All covered components - one year limited warranty

#### **SPECIFICATIONS**

## **PERFORMANCE**

	15,354
	17,060
High	371
Medium	324
Low	282
	Medium

Sound Pressure Level (dBA) H / M / L 44/41/38

#### **ELECTRICAL DATA**


Power Supply (V / Hz / Ph)	220-24	0/50/1
MOP (A)		6
Rated Current (A)	Cooling	0.21
	Heating	0.21

#### **DIMENSIONS**

Unit Dimensions (in)	Height	11 3/4
	Width	37
	Depth	7 3/4
Liquid Pipe Connection (in)		1/4

Gas Pipe Connection (in)1/2Shipping Weight (lb)33Net Weight (lb)27.5



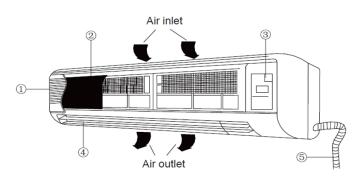

- 1. Surface Panel
- 2. Air Filters
- 3. Electronic Box Cover
- 4. Swing Louvers
- 5. Drain Hose

#### NOTES:

\*Cooling and Heating Capacity data is rated at the following conditions:


Cooling: 80 °F DB / 67 °F WB Indoor, 95 °F DB Outdoor


Heating: 70 °F DB Indoor, 47 °F DB




# SUBMITTAL DATA - INDOOR UNIT VEHW015N432T VRF WALL MOUNTED TYPE EVAPORATOR

## **DIMENSIONAL DRAWINGS**

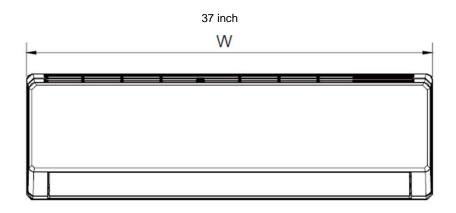







## SUBMITTAL DATA - INDOOR UNIT VEHW017N432T VRF WALL MOUNTED TYPE EVAPORATOR

Job Name:	Engineer:
Location:	Architect:
Schedule No.:	Date:
System Designation:	For: Reference Approval Review Construction

#### **FEATURES**

- · Auto Addressing installation
- Auto Restart
- · Auto Swing Louvers
- Built-in Electronic Expansion Valve
- LED Display
- Washable Filter

- Mildew-proof Filter
- Anti-Freezing Protection
- · Enameled finish

#### **PRODUCT WARRANTY**

All covered components - one year limited warranty

#### **SPECIFICATIONS**

## PERFORMANCE

Cooling Capacity* (Btu/h)		17,060
Heating Capacity* (Btu/h)		19,790
Airflow (CFM)	High	371
	Medium	324
	Low	282

Sound Pressure Level (dBA) H / M / L 44/41/38

#### **ELECTRICAL DATA**


Power Supply (V / Hz / Ph)	220-240 / 50 / 1	
MOP (A)		6
Rated Current (A)	Cooling	0.21
	Heating	0.21

#### **DIMENSIONS**

Unit Dimensions (in)	Height	11 3/4
	Width	37
	Depth	7 3/4
Liquid Pipe Connection (in)		1/4

Gas Pipe Connection (in)1/2Shipping Weight (lb)33Net Weight (lb)27.5



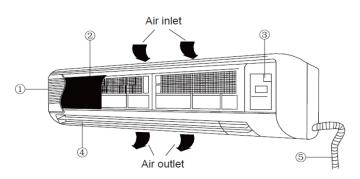

- 1. Surface Panel
- 2. Air Filters
- 3. Electronic Box Cover
- 4. Swing Louvers
- 5. Drain Hose

## NOTES:

\*Cooling and Heating Capacity data is rated at the following conditions:


Cooling: 80 °F DB / 67 °F WB Indoor, 95 °F DB Outdoor


Heating: 70 °F DB Indoor, 47 °F DB



# SUBMITTAL DATA - INDOOR UNIT VEHW017N432T VRF WALL MOUNTED TYPE EVAPORATOR

## **DIMENSIONAL DRAWINGS**

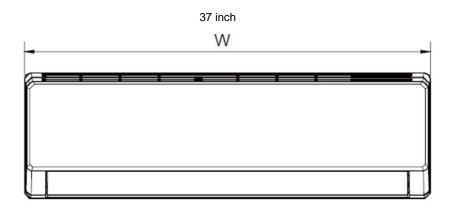







## SUBMITTAL DATA - INDOOR UNIT VEHW019N432T VRF WALL MOUNTED TYPE EVAPORATOR

Job Name:	Engineer:
Location:	Architect:
Schedule No.:	Date:
System Designation:	For: Reference Approval Review Construction

#### **FEATURES**

- · Auto Addressing installation
- Auto Restart
- Auto Swing Louvers
- Built-in Electronic Expansion Valve
- LED Display
- · Washable Filter

- Mildew-proof Filter
- Anti-Freezing Protection
- · Enameled finish

#### **PRODUCT WARRANTY**

All covered components - one year limited warranty

#### **SPECIFICATIONS**

#### **PERFORMANCE**

Cooling Capacity* (Btu/h)		19,107
Heating Capacity* (Btu/h)		21,496
Airflow (CFM)	High	441
	Medium	353
	Low	294

Sound Pressure Level (dBA) H / M / L 44/41/38

#### **ELECTRICAL DATA**


Power Supply (V / Hz / Ph)	220-24	0/50/1
MOP (A)		6
Rated Current (A)	Cooling	0.31
	Heating	0.31

#### **DIMENSIONS**

Net Weight (lb)

Unit Dimensions (in)	Height	12 1/2
	Width	39 3/4
	Depth	8 3/4
Liquid Pipe Connection (in)		3/8
Gas Pipe Connection (in)		5/8
Shipping Weight (lb)		40.8



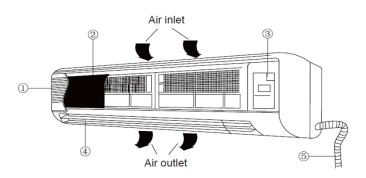

- 1. Surface Panel
- 2. Air Filters
- 3. Electronic Box Cover
- 4. Swing Louvers
- 5. Drain Hose

#### NOTES:

\*Cooling and Heating Capacity data is rated at the following conditions:

Cooling: 80 °F DB / 67 °F WB Indoor, 95 °F DB Outdoor

Heating: 70 °F DB Indoor, 47 °F DB


NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency. ©2015 Lennox Industries Inc.


33




# SUBMITTAL DATA - INDOOR UNIT VEHW019N432T VRF WALL MOUNTED TYPE EVAPORATOR

## **DIMENSIONAL DRAWINGS**

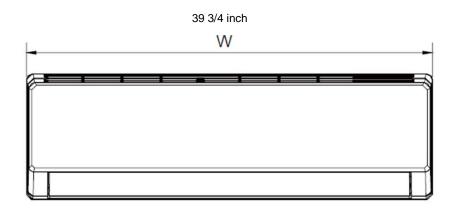







## SUBMITTAL DATA - INDOOR UNIT VEHW021N432T VRF WALL MOUNTED TYPE EVAPORATOR

Job Name:	Engineer:
Location:	Architect:
Schedule No.:	Date:
System Designation:	For: Reference Approval Review Construction

#### **FEATURES**

- · Auto Addressing installation
- Auto Restart
- Auto Swing Louvers
- Built-in Electronic Expansion Valve
- LED Display
- Washable Filter

- Mildew-proof Filter
- Anti-Freezing Protection
- · Enameled finish

#### **PRODUCT WARRANTY**

All covered components - one year limited warranty

			ΔΤΙ		

#### **PERFORMANCE**

Cooling Capacity* (Btu/h)		21,496
Heating Capacity* (Btu/h)		23,884
Airflow (CFM)	High	441
	Medium	353
	Low	294

Sound Pressure Level (dBA) H / M / L 44/41/38

#### **ELECTRICAL DATA**


Power Supply (V / Hz / Ph)	220-24	0/50/1
MOP (A)		6
Rated Current (A)	Cooling	0.31
	Heating	0.31

#### **DIMENSIONS**

Unit Dimensions (in)	Height	12 1/2
	Width	39 3/4
	Depth	8 3/4

Liquid Pipe Connection (in)3/8Gas Pipe Connection (in)5/8Shipping Weight (lb)40.8Net Weight (lb)33



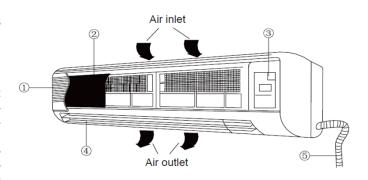

- 1. Surface Panel
- 2. Air Filters
- 3. Electronic Box Cover
- 4. Swing Louvers
- 5. Drain Hose

#### NOTES:

\*Cooling and Heating Capacity data is rated at the following


Cooling: 80 °F DB / 67 °F WB Indoor, 95 °F DB Outdoor


Heating: 70 °F DB Indoor, 47 °F DB




# SUBMITTAL DATA - INDOOR UNIT VEHW021N432T VRF WALL MOUNTED TYPE EVAPORATOR

## **DIMENSIONAL DRAWINGS**

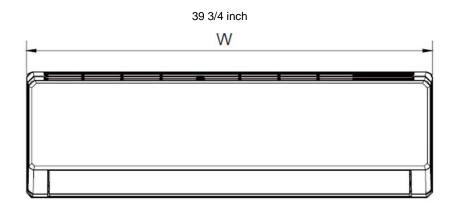







## SUBMITTAL DATA - INDOOR UNIT VEHW024N432T VRF WALL MOUNTED TYPE EVAPORATOR

Job Name:	Engineer:
Location:	Architect:
Schedule No.:	Date:
System Designation:	For: Reference Approval Review Construction

#### **FEATURES**

- · Auto Addressing installation
- Auto Restart
- Auto Swing Louvers
- Built-in Electronic Expansion Valve
- LED Display
- Washable Filter

- Mildew-proof Filter
- Anti-Freezing Protection
- · Enameled finish

#### **PRODUCT WARRANTY**

All covered components - one year limited warranty

## **SPECIFICATIONS**

#### **PERFORMANCE**

 Cooling Capacity\* (Btu/h)
 24,225

 Heating Capacity\* (Btu/h)
 25,590

 Airflow (CFM)
 High Medium 353

 Low 294

Sound Pressure Level (dBA) H / M / L 44/41/38

#### **ELECTRICAL DATA**

Power Supply (V / Hz / Ph)	220-24	0 / 50 / 1
MOP (A)		6
Rated Current (A)	Cooling	0.31
	Heating	0.31

#### **DIMENSIONS**

Unit Dimensions (in)


Height 12 1/2
Width 39 3/4
Depth 8 3/4

Liquid Pipe Connection (in)

3/8

Liquid Pipe Connection (in) 3/8
Gas Pipe Connection (in) 5/8
Shipping Weight (lb) 40.8
Net Weight (lb) 33



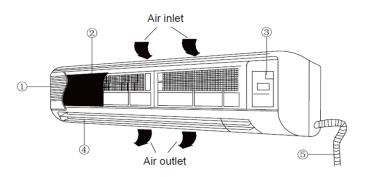

- 1. Surface Panel
- 2. Air Filters
- 3. Electronic Box Cover
- 4. Swing Louvers
- 5. Drain Hose

NOTES:

\*Cooling and Heating Capacity data is rated at the following

Cooling: 80 °F DB / 67 °F WB Indoor, 95 °F DB Outdoor

Heating: 70 °F DB Indoor, 47 °F DB



# SUBMITTAL DATA - INDOOR UNIT VEHW024N432T VRF WALL MOUNTED TYPE EVAPORATOR

## **DIMENSIONAL DRAWINGS**

