



SUBMITTAL DATA - CONTROLS
VE24V1F
VRF 24V / DRY CONTACT ADAPTER

Job Name: _____
 Location: _____
 Schedule No.: _____
 System Designation: _____


Engineer: _____
 Architect: _____
 Date: _____
 For: ___ Reference ___ Approval ___ Review ___ Construction

FEATURES AND FUNCTIONS

- 2 in 1 device: 24V control and Dry Contact control
- In 24V control mode, any third-party thermostat could be used for equipment control.
- In Dry Contact mode, dry contact signals such as fire alarm, overflow protection, can be sent to shut down equipment.
- Seamless configuration.
- For third-party thermostats, a 24V transformer must be installed to power up the thermostat.
- Communication bridge with smart thermostats
- Built-in LED display for configuration and troubleshooting.



UNIT DIMENSIONS

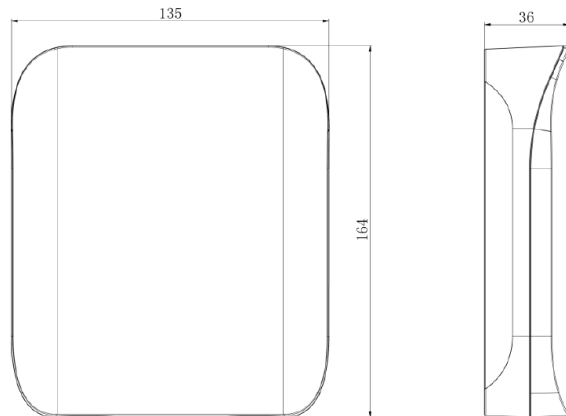

SPECIFICATIONS

PERFORMANCE

Power Supply	24V for 24V mode
Cooling Setting Temperature	17 °C - 30 °C 63 °F - 86 °F
Heating Setting Temperature	16 °C - 29 °C 61 °F - 84 °F

DIMENSIONS	mm	inches
Unit Dimensions (in) Height	164	6 2/5
Width	135	5 1/4
Depth	36	1 2/5

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency. ©2020 Lennox Industries Inc.