



SUBMITTAL DATA - INDOOR UNIT
LXG FCCMD036100P64
LCAC DUCT TYPE EVAPORATOR

Job: _____
 Location: _____
 Schedule No.: _____
 System Designation: _____

Engineer: _____
 Architect: _____
 Date: _____

FEATURES

- Weekly Timer Wired control included
- Auto Restart
- Wireless Remote Included
- Follow Me function

SPECIFICATIONS

PERFORMANCE

Cooling Capacity (Btu/h)		36,000
EER(W/W)		2.64
SEER(BTUH/W)		/
Heating Capacity (Btu/h)		/
HSPF(BTUH/W)		/
Airflow (CFM)	High	1015
	Medium	702
	Low	583
Sound Pressure (dBA)	High	49.8
	Medium	42.3
	Low	40.0
External Static Rated Pressure (Pa)		37
External Static Pressure Range (Pa)		0 - 160

ELECTRICAL DATA

Power Supply (V/Hz/φ)		220-230/60/1
Max Current (A)	with 3 phase ODU	25.5
	with 1 phase ODU	15
Rated Current (A)	Cooling	1.3
	Heating	/


DIMENSIONS

Unit Dimensions (in)	Height	9.8
	Width	43.3
	Depth	30.5
Liquid Pipe Connection (in)		3/8"
Gas Pipe Connection (in)		3/4"
Shipping Weight (lb)		90.2
Net Weight (lb)		74.1

PRODUCT WARRANTY

5 Year Limited Warranty*

Model No.: LXG FCCMD036100P64
CAT No.: Y5677

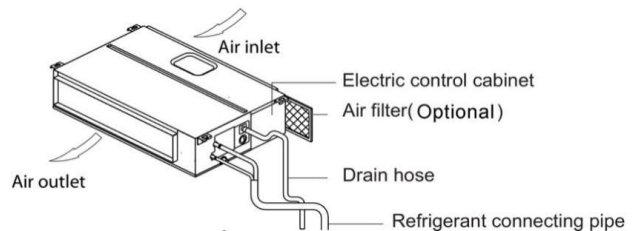

NOTES

Cooling and Heating Capacity data is rated at the following conditions:
 Cooling: 80°FDB / 67°FWB Indoor, 95°FDB/ 75°FWB Outdoor
 Heating: 68°FDB / 59°FWB Indoor, 45°FDB/ 43°FWB Outdoor

OPTIONAL ACCESORIES



NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings, and Dimensions are subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency



SUBMITTAL DATA - INDOOR UNIT
LGX FCCMD036100P64
LCAC DUCT TYPE EVAPORATOR


WIRELESS CONTROLLER SPECIFICATIONS

21F34 (RG66A1/BGEF)	
Power Supply	2 AAA Batteries (Included)
Setpoint Range	62°F(17°C) - 86°F(30°C)
Effective Receiving Range	26 ft.(8m)

WIRED CONTROLLER SPECIFICATIONS

21F37 (KJR-120G2/TFBG-E-02)	
Power Supply	DC 12V, Supplied by IDU
Setpoint Range	62°F(17°C) - 86°F(30°C)
Effective Receiving Range	65 ft.(20m)


WIRELESS CONTROLLER DISPLAY

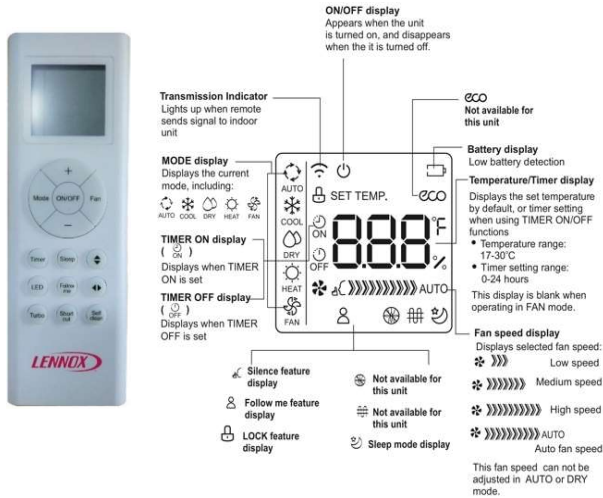

WIRED CONTROLLER DISPLAY



WIRED CONTROLLER FUNCTION DISPLAY

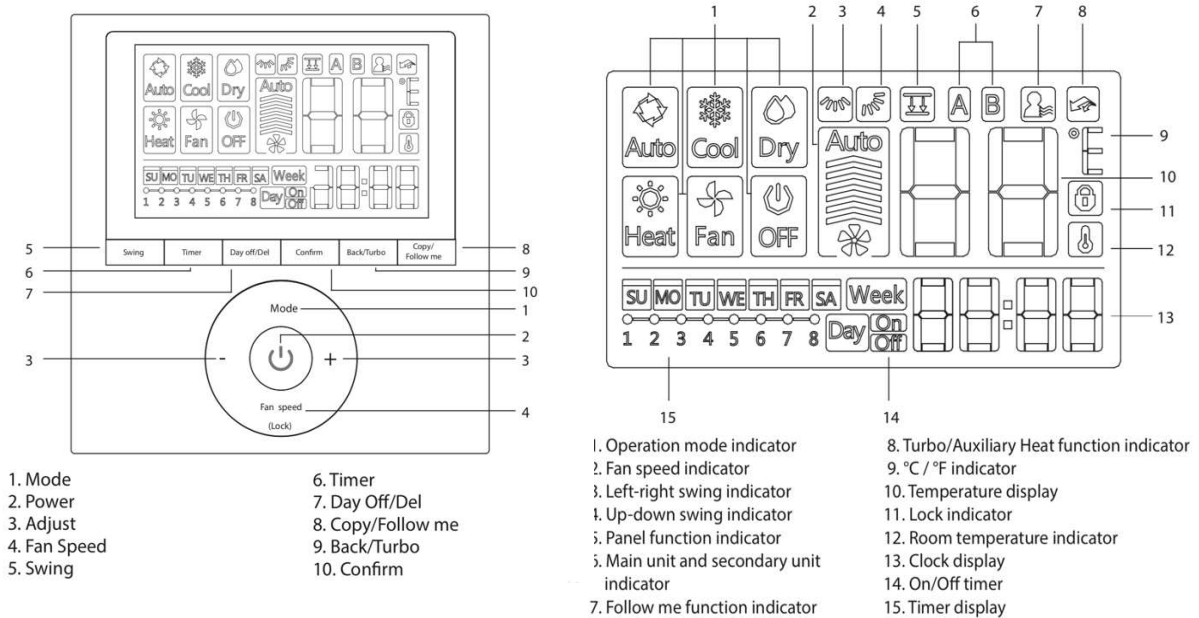


NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings, and Dimensions are subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency




SUBMITTAL DATA - INDOOR UNIT
LXG FCCMD036100P64
LCAC DUCT TYPE EVAPORATOR

DIMENSIONAL DRAWINGS - INCHES (MM)


Air outlet dimensions

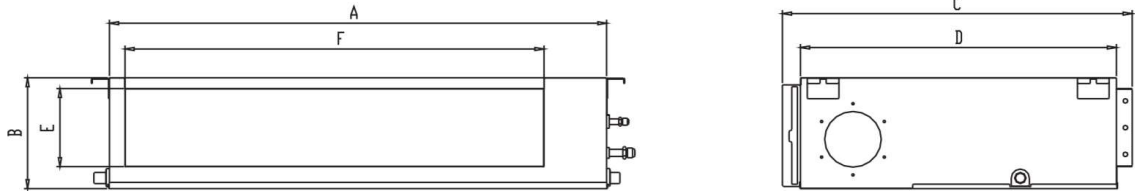

Air inlet dimensions

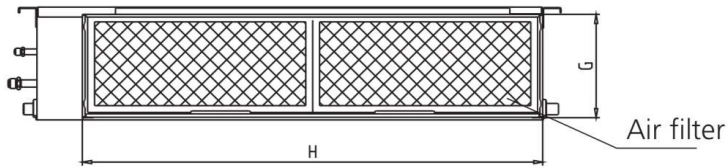

Descending ventilation opening and mounted hook

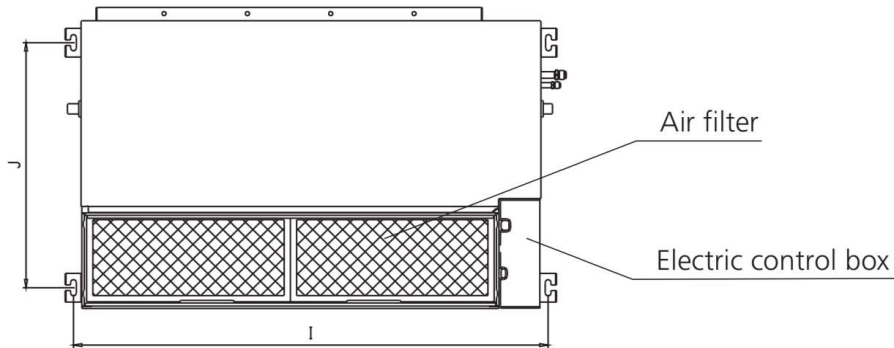

IDU	Outline dimension				Air outlet opening size		Air return opening size		Size of mounted lug	
	A	B	C	D	E	F	G	H	I	J
Inch	43.3	9.8	30.5	27.6	6.9	36.5	8.9	39.4	44.9	23.5
mm	1100	249	774	700	175	926	228	1001	1140	598

NOTE – Due to Lennox’ ongoing commitment to quality, Specifications, Ratings, and Dimensions are subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency