

SUBMITTAL DATA - INDOOR UNIT VE4C015N432U VRF STD 4-WAY CASSETTE TYPE EVAPORATOR

Job Name:	Engineer:	
Location:	Architect:	
Schedule No.:	Date:	
System Designation:	For: Reference Approval Review Construction	

FEATURES

- Auto Addressing installation
- Auto Restart
- Replaceable Front Panel
- Integrated Condensate Pump
- Built-in Electronic Expansion Valve
- LED Display


H/M/L 36/34/31

- Washable Filter
- Water Overflow Protection
- Anti-Freezing Protection

PRODUCT WARRANTY

All covered components - Five year limited warranty

SPECIFICATIONS		
PERFORMANCE		
Cooling Capacity* (Btu/h)		15,354
Heating Capacity* (Btu/h)		17,060
Airflow (CFM)	High	440
	Medium	383
	Low	325




Power Supply (V / Hz / Ph)	220-240/50/1 - 208-2	230/60/1
MOP (A)		6
Rated Current (A)	Cooling	0.2
	Heating	0.2

DIMENSIONS

nit Dimensions (in)	Height	7 1/2
	Width	33
	Depth	33

Liquid Pipe Connection (in) 1/4
Gas Pipe Connection (in) 1/2
Shipping Weight (lb) 65
Net Weight (lb) 49.6



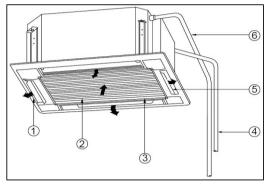

- 1. Air Outlet
- 2. Air Filter
- 3. Grill
- 4. Refrigerant Piping
- 5. Louvers
- 6. Drain Pipe

NOTES:

*Cooling and Heating Capacity data is rated at the following conditions:

Cooling: 80 °F DB / 67 °F WB Indoor, 95 °F DB Outdoor


Heating: 70 °F DB Indoor, 47 °F DB


NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency. ©2017 Lennox Industries Inc.



SUBMITTAL DATA - INDOOR UNIT VE4C015N432U VRF STD 4-WAY CASSETTE TYPE EVAPORATOR

DIMENSIONAL DRAWINGS

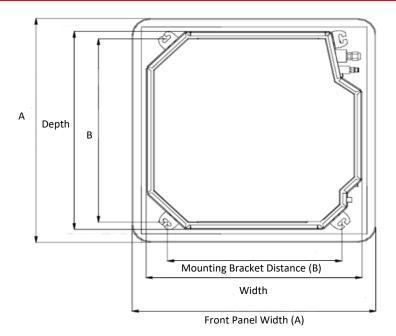

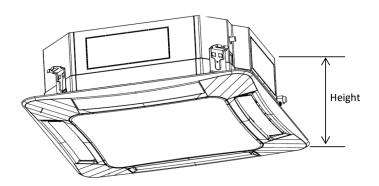

	mm	in
Width	840	33.07
Depth	840	33.07
Height	190	7.48
Α	950	37.40
В	680	26.77

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency. ©2017 Lennox Industries Inc.